

LED SMART DOWNLIGHT

apollo RGBCW



Model No. AL8APDLRGGBT

240V 50Hz



2700K - 6500K

CHANGEABLE WITH APP

RGBCW




- Music function
- Voice control via Tuya Gateway
- Die-cast downlight
- High efficiency SMD chips
- Constant current driver
- RGB, 16million colour. 2700-6500k
- Highly transparent opal polycarbonate diffuser
- Trailing edge dimming option
- 1.2m flex and plug included
- IC-4 rating - can be installed under ceiling insulation

Powered by

tuya

Intelligence
Inside

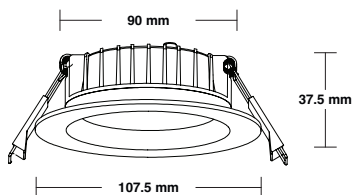

Operating Voltage	240V AC, 50Hz
Diameter	107.5 x 37.5 mm
Lumen	1000LM
Colour Temp	RGBCW, 2700 - 6500k
Beam Angle	100°
CRI	>80
IP Rating	IP44
Rated Fittings Lifetime In HRS	50,000
Weight	0.39kg
Inclusions	Flex and plug 1.2m Constant current external
Driver	APP dimming
Construction	Die - cast aluminium
Cut Out	90mm

SMART GATEWAY AVAILABLE to Enable Remote Access and Voice Control Model No. AL8APTYGWBS-01N