

EMERGENCY LIGHT

ufofire

SURFACE MOUNT

Model No. AL8UF6030-S

Complies with AS/NZ2293



240V 50Hz


SELF TESTING TECHNOLOGY



3 Hours Operation
Discharge

ALSO AVAILABLE
IN BLACK

Model No. AL8UF6030-S-B

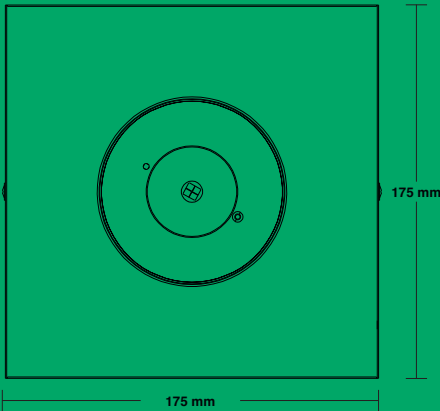

Classification
Spacing Classification
Battery Type
Emergency Battery Run-Time
Rated Fittings Lifetime In HRS
Operating Mode
Wattage
Weight
Wiring
Mounting

Construction

CO=D40. C90=D40
 D40
 Lithium 2200 mAh
 3 Hours Discharge
 50,000
 Non Maintained
 3W
 0.93kg
 Hardwired
 Quick Fit Bracket for Fast
 Ceiling or Wall Mount
 Polycarbonate Body with
 Aluminium Heat Sink